



English



S203-C16

Print to PDF

Buy now

General Information

Extended Product Type:

S203-C16

Product ID:

2CDS253001R0164

EAN:

4016779468008

Catalog Description:

Miniature Circuit Breaker - S200 - 3P - 16 A - C

Long Description:

System pro M compact S200 miniature circuit breakers are current limiting. They have two different tripping mechanisms, the delayed thermal tripping mechanism for overload protection and the electromechanic tripping mechanism for short circuit protection. They are

available in different characterist... [Show more](#)

[Add to Cart](#)

[Read More](#)

[Data Sheet](#)

[Downloads](#)

[Buy now](#)

[Categories](#)

[Related Links](#)

[Related Products](#)

Go To Section:

- ABB EcoSolutions
- Technical
- Electrical
- Design
- Technical UL/CSA
- Material Compliance
- Environmental
- Dimensions
- Ordering
- Certificates and Declarations
- Installation
- Popular Downloads
- External Classifications and Standards
- Accessories

ABB EcoSolutions

ABB EcoSolutions:

Yes

EcoSolutions Profile:

[Ecosolutions Product Profile_S200 MCB](#)

Recyclability Rate of the Product acc. to EN45555:

Design for Closing Resource Loops - Standard EN45555 - 87.8 %

Extended Product Lifetime:

Product Durability

End Of Life Disassembling Instructions:

[End of life instruction S200, S200L, SZ200, SC200, S200M](#)

Environmental Product Declaration - EPD:

[EPD MCB Compact S200 \(...M, SC..., ST..., ...MTUC, ...MT & MUC\) family.](#)

Technical

Dielectric Test Voltage:

50/60 Hz-1 min: 2 kV

Rated Ultimate Short-Circuit Breaking Capacity (I_{cu}):

- (230 V AC) 20 kA
- (400 V AC) 10 kA
- (440 V AC) 10 kA
- (230 V) 20 kA
- (400 V) 10 kA

Rated Service Short-Circuit Breaking Capacity (I_{cs}):

- (230 V AC) 15 kA
- (400 V AC) 7.5 kA
- (440 V AC) 7.5 kA

Power Supply Connection:

Arbitrary

Contact Position Indication:

Red ON / Green OFF

Energy Limiting Class:

3

Electrical Endurance:

20000 AC cycle

Mechanical Endurance:

20000 cycle

Number of Protected Poles:

3

Number of Poles:

3P

Tightening Torque:

2.8 N·m

Screw Terminal Type:

Failsafe Bi-directional Cylinder-lift Terminal

Actuator Marking:

I / O

Actuator Material:

Insulation Group II, Black, Sealable

Recommended Screw Driver:

Pozidriv 2

Accessories Available:

Yes

Connecting Capacity:

- Busbar 10 / 10 mm²
- Flexible with Ferrule 0.75 ... 25 mm²
- Flexible 0.75 ... 25 mm²
- Rigid 0.75 ... 35 mm²
- Rigid 0.75 ... 35 mm²
- Stranded 0.75 ... 35 mm²

Installation Size:

acc. to DIN 43880 1

Wire Stripping Length:

12.5 mm

Terminal Type:

Screw Terminals

Electrical

Tripping Characteristic:

C

Rated Operational Voltage:

- acc. to IEC 60898-1 400 V AC
- acc. to IEC 60898-1 400 V
- acc. to IEC 60947-2 440 V AC

Operational Voltage:

- Maximum (Incl. Tolerance) 440 V AC
- Minimum 12 V AC
- Minimum 12 V DC

Rated Insulation Voltage (U_i):

acc. to IEC/EN 60664-1 440 V

Rated Impulse Withstand Voltage (U_{imp}):

4 kV

at 2000 m 5 kV
at Sea Level 6.2 kV

Input Voltage Type:

AC/DC

Rated Current (I_n):

16 A

Rated Short-Circuit Capacity:

(AC) 6 kA
(DC) 6 kA
(400 V AC) 6 kA
(400 V) 6 kA

Rated Conditional Short-Circuit Current (I_{nc}):

(230 V) 20 kA
(400 V) 20 kA

Frequency (f):

50 Hz

Rated Frequency (f):

50 / 60 Hz

Power Loss:

7.5 W
at Rated Operating Conditions per Pole 2.5 W

Overvoltage Category:

III

Design

Housing Material:

Insulation Group II, RAL 7035

Technical UL/CSA

Maximum Operating Voltage UL/CSA:

110 V DC
480Y/277 V AC

Interrupting Rating acc. to UL1077:

(277 V AC) 6 kA
(480Y / 277 V AC) 6 kA
(240 V) 10 kA

Connecting Capacity UL/CSA:

Busbar 18-8 AWG
Conductor 18-4 AWG

Tightening Torque UL/CSA:

18 in·lb

Material Compliance

RoHS Information:

EU Declaration of Conformity S200L, S200, S200M

RoHS Status:

Following EU Directive 2011/65/EU and Amendment 2015/863 July 22, 2019

RoHS Date:

0335

REACH Declaration:

Declaration regarding the REACH-Regulation

REACH Information:

True - contains substances > 0.1 mass percentage

REACH Date:

20240821

Conflict Minerals Reporting Template (CMRT):

Conflict Minerals Reporting Template

SCIP:

e6800e55-46b1-49a3-881b-0f66d0e903ad Germany

WEEE Category:

5. Small Equipment (No External Dimension More Than 50 cm)

WEEE B2C / B2B:

Business To Business

Environmental

Ambient Air Temperature:

Operation -25 ... +55 °C

Storage -40 ... +70 °C

Reference Ambient Air Temperature:

30 °C

Degree of Protection:

IP20

IP40

Enclosure with Cover IP40

Pollution Degree:

3

Environmental Conditions:

28 cycles

with 55 °C / 90-96 %

and 25 °C / 95-100 %

Resistance to Vibrations:

20 Cycles with Load 0.8 In: 5g 5 ... 150 ... 5 Hz

Resistance to Shock acc. to IEC 60068-2-27:

25g 2 shocks 13 ms

Dimensions

Width in Number of Modular Spacings:

3,0

Product Net Width:

52.5 mm

Product Net Height:

88 mm

Product Net Depth / Length:

69 mm

Product Net Weight:

0.375 kg

Pole Net Weight:

0.125 kg

Built-In Depth (t_2):

69 mm

Dimension Diagram:

[Dimensioned drawing S200, S200L, S200M](#)



Ordering

Package Level 1 Units:

carton 1 piece

Package Level 1 Gross Weight:

0.4 kg

E-Number (Finland):

3210616

E-Number (Norway):

1665320

E-Number (Sweden):

2100600

Certificates and Declarations

Declaration of Conformity - CE:

[EU Declaration of Conformity S200L, S200, S200M](#)

Declaration of Conformity - UKCA:

[UKCA Declaration of Conformity - S200, S200M](#)

I²t Characteristic:

[S200_S200M_S200P let-through energy B-C](#)

Installation

Instructions and Manuals:

[S200, S300 instruction manual](#)

Mounting Type:

DIN-Rail

Mounting on DIN Rail:

TH35-15 (35 x 15 mm Mounting Rail) acc. to IEC 60715

TH35-7.5 (35 x 7.5 mm Mounting Rail) acc. to IEC 60715

Mounting Position:

any

Popular Downloads

Data Sheet, Technical Information:

[A_Electrical installation solutions for buildings_part A - 2nd edition 2024 \[EN\]_\(PDF\)](#)

I²t Characteristic:

[S200_S200M_S200P let-through energy B-C](#)

External Classifications and Standards

ETIM 9:

EC000042 - Miniature circuit breaker (MCB)

UNSPSC:

39121603

eClass:

V11.0 : 27141901

IDEA Granular Category Code (IGCC):

4897 >> Miniature circuit breakers

Object Classification Code:

F

Standards:

IEC/EN 60898-1

IEC/EN 60947-2

UL 1077

Certification Agency:

EN

IEC

UL

Standardization Body:

EN

IEC

UL

Accessories

[Clear all](#)
[Show all filters \(37\)](#)

[Number of Auxiliary Contacts CO \(SPDT\)](#)

10

[Number of Auxiliary Contacts NC](#)

10


[Number of Auxiliary Contacts NO](#)

10

29 Products

Search products...

Identifier	Description	Type	Qty	Unit Of Measure	Actions
2CDS200922R0001	Signal/Auxiliary Contact	S2C-S/H6R	1	piece	
2CDS200912R0001	Auxiliary Contact	S2C-H6R	1	piece	
2CDS200970R0031	Auxiliary Contact	S2C-H01	1	piece	
2CDS200970R0032	Auxiliary Contact	S2C-H10	1	piece	
2CDS200936R0001	Auxiliary Contact	S2C-H11L	1	piece	

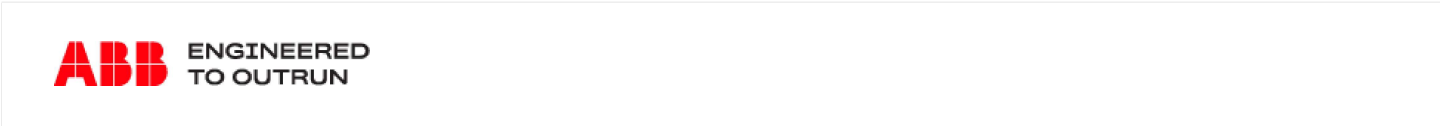

PRODUCTS	INDUSTRY SOLUTIONS	INVESTORS	COMPANY
Offerings A-Z	Channel partners	Investor & shareholder resources	Customer events
Services	Buildings and infrastructure	Quarterly results & annual reports	News & media
Where to buy	Industrial automation	Corporate governance	Who we are
	Marine	Calendar, events and publications	Innovation
	Oil & gas		Careers
	Power generation		Sustainability
			Our values
			Supplying



[Provider information](#)

[Privacy Notice](#)

[Cookie settings](#)

© 1995 - 2025