

Data sheet

4AC2402



Power supply unit for permanent load Primary 85..265 V AC, 85..300 V DC
Secondary 24 V DC +5% Overall width 2MW Short-circuit and overload protection

Model		
product brand name		SETRON
product designation		Power supply unit
design of the transformer		Power transformer
General technical data		
supplied active power maximum		8.4 W
Voltage		
input voltage		265 V
output voltage		
• _1 rated value		24 V
• _2 rated value		0 V
• _3 rated value		0 V
Suitability		
suitability for integration		
• surface-mounted installation		No
• flush mounting		No
Product details		
product component switch		No
Product function		
product function thermal protection		Yes
Inputs Outputs		
property of the output short-circuit proof		Yes
Mechanical Design		
height		64 mm
width		36 mm
length		90 mm
number of modular width units		2
fastening method side-by-side mounting		Yes
Approvals Certificates		
General Product Approval	other	Environment

Confirmation



Confirmation

Miscellaneous

Environmental Con- firmations

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

<https://support.industry.siemens.com/cs/ww/en/view/100010003>
Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=4AC2402>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/4AC2402>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=4AC2402


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

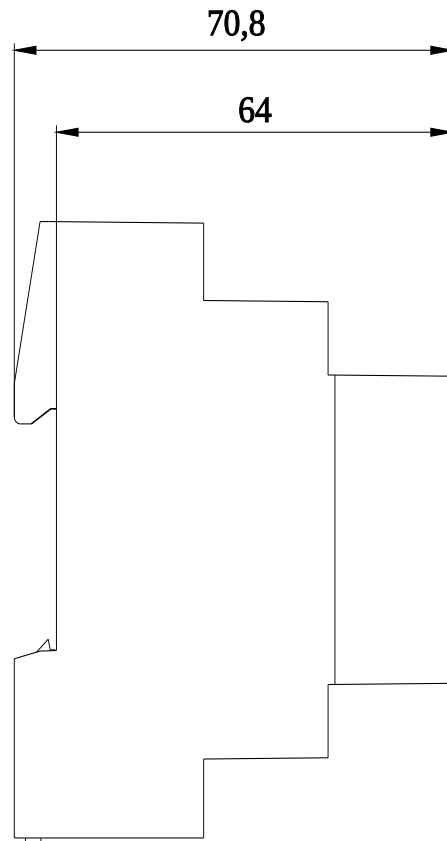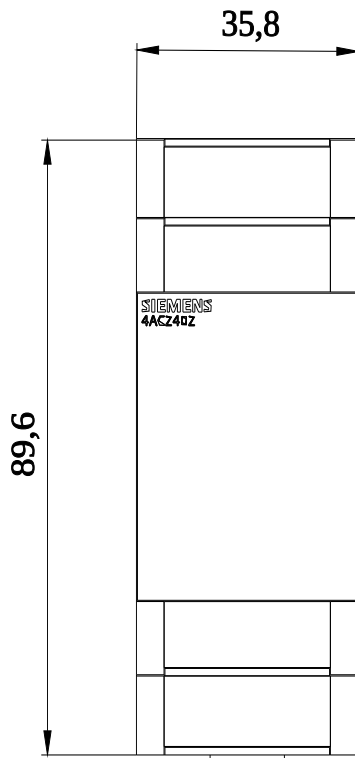

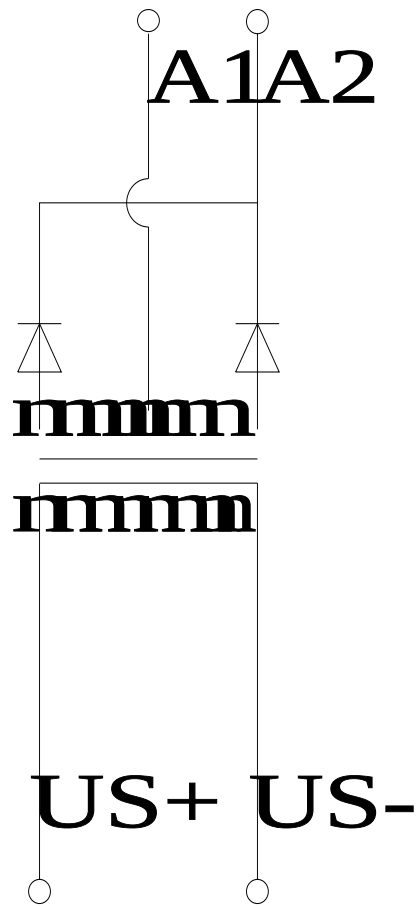

last modified:

4/23/2021 

