



Bell transformer, 14VA Primary 230-240 V AC, 50 Hz, secondary 8 V, 12V, 24V AC
With PTC fuse, 2MW++

Model	
product brand name	SETRON
product designation	Bell transformer
design of the transformer	Standard bell transformer
General technical data	
supplied active power maximum	14 W
Voltage	
input voltage	230 V
output voltage	
• _1 rated value	8 V
• _2 rated value	12 V
• _3 rated value	24 V
Dissipation	
power loss [W] for rated value of the current at AC in hot operating state per pole	11 W
Suitability	
suitability for integration	
• surface-mounted installation	No
• flush mounting	No
Product details	
product component switch	No
Product function	
product function thermal protection	Yes
Inputs Outputs	
property of the output short-circuit proof	Yes
Mechanical Design	
height	64 mm
width	36 mm
length	90 mm
number of modular width units	2
fastening method side-by-side mounting	Yes
Approvals Certificates	
General Product Approval	other



[Confirmation](#)



[Miscellaneous](#)

[Confirmation](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=4AC3214-0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/4AC3214-0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=4AC3214-0

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

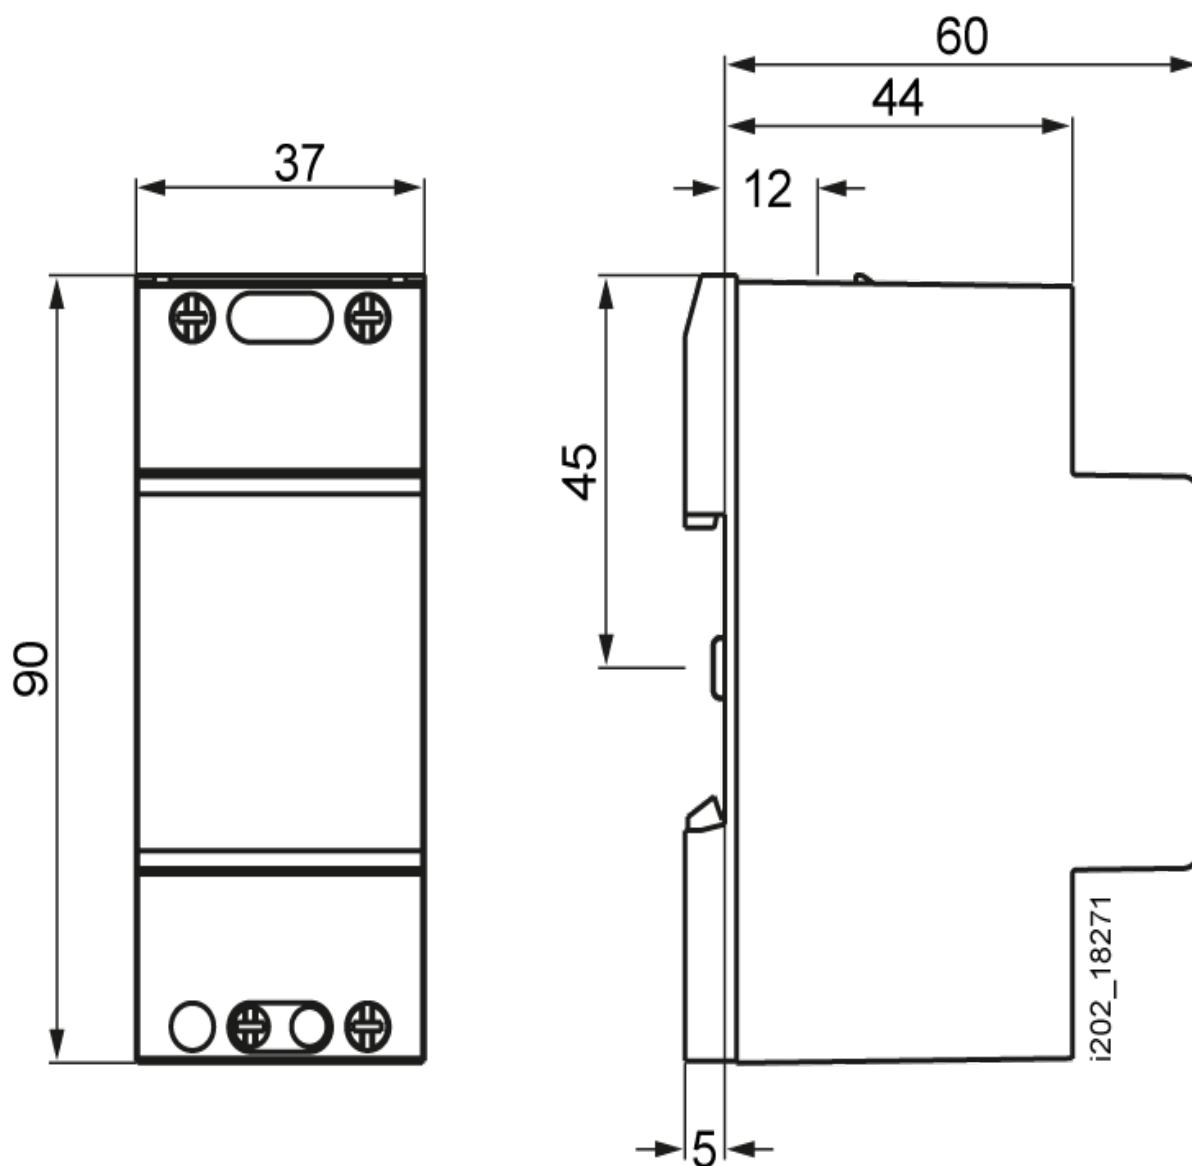

last modified:

3/11/2021

